


6-219590-2 | CS24CM WHT C5E 4/24 U/UTP CPK 305M

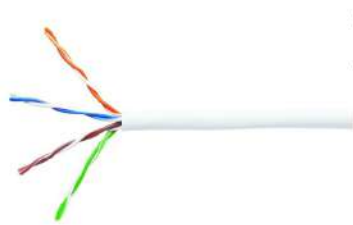

Copper Cable, category 5e, 4 pair, U/UTP, CM rated, 24 AWG, 1000 ft, white

Product Classification

Regional Availability	Asia
Portfolio	NETCONNECT®
Product Type	Twisted pair cable
Product Series	510 Series

General Specifications


Product Number	510M
ANSI/TIA Category	5e
Cable Component Type	Horizontal
Cable Type	U/UTP (unshielded)
Conductor Type, singles	Solid
Conductors, quantity	8
Jacket Color	White
Pairs, quantity	4
Transmission Standards	ANSI/TIA-568.2-D CENELEC EN 50288-6-1 ISO/IEC 11801 Class D

Dimensions

Cable Length	304.8 m 1000 ft
Diameter Over Jacket, nominal	4.902 mm 0.193 in
Conductor Gauge, singles	24 AWG

Cross Section Drawing

6-219590-2 | CS24CM WHT C5E 4/24 U/UTP CPK 305M

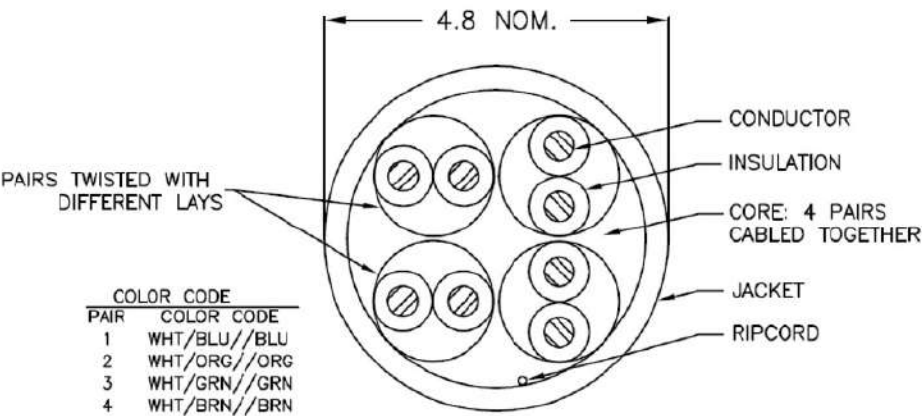

Electrical Specifications

Operating Voltage, maximum	80 V
Remote Powering	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A

6-219590-2 | CS24CM WHT C5E 4/24 U/UTP CPK 305M

Electrical Cable Performance

CS	CommScope		
STD	Refers to the standard value listed under Transmission Standards in the Electrical Specifications above		
TYP	Typical Electrical Performance		
IL	Insertion Loss (dB/100m)	NEXT	Near End Crosstalk (dB/100m)
ACR	Attenuation to Crosstalk Ratio (dB/100m)	PSNEXT	Power Sum Near End Crosstalk (db/100m)
PSACR	Power Sum Attenuation to Crosstalk Ratio (dB/100m)	ACRF	Attenuation to Crosstalk Ratio - Far End (dB/100m)
PSACRF	Power Sum Attenuation to Crosstalk Ratio - Far End (dB/100m)	RL	Return Loss (dB)
TCL	Transverse Conversion Loss (dB/100m)	ELTCTL	Equal Level Transverse Conversion Transfer Loss (dB/100m)

Freq. MHz	IL	NEXT	ACR	PSNEXT	PSACR	ACRF	PSACRF	RL
	STD	STD	STD	STD	STD	STD	STD	STD
1	2	65.3	63.3	62.3	60.3	63.8	60.8	20
4	4.1	56.3	52.2	53.3	49.2	51.8	48.8	23
8	5.8	51.8	46	48.8	43	45.7	42.7	24.5
10	6.5	50.3	43.8	47.3	40.8	43.8	40.8	25
16	8.2	47.2	39	44.2	36	39.7	36.7	25
20	9.3	45.8	36.5	42.8	33.5	37.8	34.8	25
25	10.4	44.3	33.9	41.3	30.9	35.8	32.8	24.3
31.25	11.7	42.9	31.2	39.9	28.2	33.9	30.9	23.6
62.5	17	38.4	21.4	35.4	18.4	27.9	24.9	21.5
100	22	35.3	13.3	32.3	10.3	23.8	20.8	20.1

Material Specifications

Conductor Material	Bare copper
Insulation Material	Polyolefin
Jacket Material	PVC

Environmental Specifications

Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Flame Test Method	CM

Packaging and Weights

Packaging Type	Reel
-----------------------	------

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant

6-219590-2 | CS24CM WHT C5E 4/24 U/UTP CPK
305M

