



BE19000 Tri-Band Wi-Fi 7 Router

Redefining Wi-Fi Routers

Wi-Fi 7



Archer BE800

Unprecedented Speeds

4x Faster with 19 Gbps Tri-Band Wi-Fi*

Blazing-Fast 6 GHz Band

The Latest Wi-Fi Band up to 11.5 Gbps*

Ultra Smooth Wi-Fi

4x Lower Latency with Minimal Buffering*

Multi-Gig Connectivity

2x 10 Gbps Ports + 4x 2.5 Gbps Ports

Highlights


Wi-Fi 7 — Wi-Fi Like Never Before



-  **Unprecedented 19 Gbps 12-Stream Tri-Band Wi-Fi[†]**
Wi-Fi 7 unleashes the full potential of the 6 GHz band with up to 320 MHz channels and 11.5 Gbps Wi-Fi speeds. Enjoy full access to 8K streaming and high-speed downloading.^{†‡}
-  **4× Faster Speeds to Power Your Devices[§]**
Multi-Link Operation (MLO) enables Archer BE800 to transmit data with Wi-Fi 7 clients across the 6 GHz and 5 GHz bands simultaneously, delivering 4× faster Wi-Fi speeds than Wi-Fi 6/6E routers.[‡]
-  **Ultra Smooth Wi-Fi with 4× Lower Latency[¶]**
4× lower latency than Wi-Fi 6/6E routers enables emerging applications like VR/AR, video conferencing, and online gaming to always run at top performance.
-  **Higher Capacity for Devices[¶]**
Communicates with multiple devices via 12 streams and tri-band simultaneously. Combined with the powerful CPU, Wi-Fi 7 provides congestion-free signals to your laptop, TV, thermostat, and baby monitor.

Highlights

Archer BE800 — Redefining Wi-Fi Routers

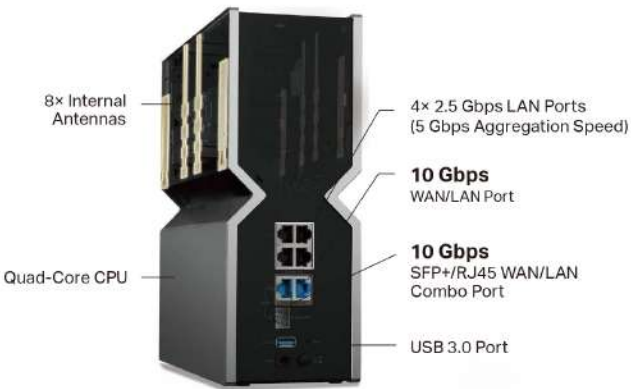

- 2× 10 Gbps Ports for Flexible Multi-Gigabit Connections**
Equipped with two 10 Gbps WAN/LAN ports—one RJ45 port and an RJ45/SFP+ combo port—Archer BE800 provides flexible support for both fiber and copper connections. The additional four 2.5 Gbps ports and one USB port make it an ideal solution for future-proofing your home network.[§]
- Far-Reaching Coverage**
8× optimally positioned antennas, proprietary Wi-Fi optimization, and Beamforming technology deliver broader coverage, more capacity, stronger and more reliable connections, and less interference.

Highlights

TP-Link HomeShield

Manage online time and block inappropriate content to maintain healthy online habits with Parental Controls. Quality of Services (QoS) and Network Protection further keep your home network smooth and safe.*



Great Compatibility


Take your Wi-Fi to the next level without worry. Archer BE800 offers great compatibility by working with all Wi-Fi generations and devices*** and all internet providers.**** It also works with Alexa and Google Assistant.



Highlights

Flexible Whole Home Wi-Fi

Archer BE800 is compatible with EasyMesh to form seamless whole home mesh Wi-Fi, preventing drops and lag when moving between signals. Enjoy uninterrupted streaming when moving around your home. ^①

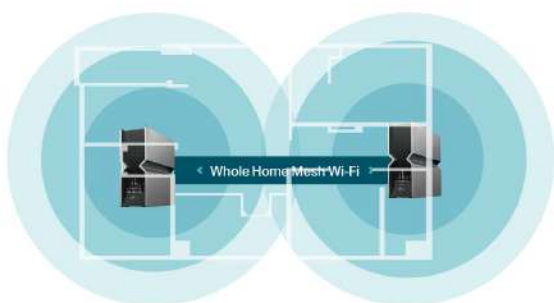

VPN Client Support

Archer BE800 allows specified devices in your home network to access remote VPN servers without needing to install VPN software on every device. Archer BE800 can also run a VPN and ordinary internet connections at the same time for added security and flexibility.



Features



Ultra-Fast Speed

- **Warp-Speed BE19000 Wi-Fi** – Up to 19 Gbps quad-band Wi-Fi 7 enables gaming, streaming and high-speed downloading on multiple devices—all at the same time[†]
- **10G Multi-Gig Ports** – Two 10G ports—one RJ45 port and a RJ45/SFP+ combo port—Archer BE800 provides flexible support for both fiber and copper connections. Make full use of gigabit speeds from your local ISP.[§]
- **Greenfield 6 GHz Band** – Provides robust high-speed connections with a brand-new expansive and congestion-free band.
- **Wi-Fi 7** – Wi-Fi 7 (802.11be) features advanced technologies, including 320MHz channels and 4K QAM, drastically increasing the speed and efficiency of your entire network.[‡]
- **Smart Connect** – Intelligently assigns each device to the best Wi-Fi band for optimal performance.

High Capacity and Reliable Connections

- **Maximized Capacity** – Communicates with multiple devices via 12 streams and tri-band simultaneously. Combined with OFDMA and MU-MIMO, 16 streams won't affect your online gaming.^{*}
- **19 Gbps Quad-Band Wi-Fi 7** – Enables your devices to run at full speed. Enjoy robust high-speed connections congestion-free on the wide and clear 6 GHz band.
- **Airtime Fairness** – Balances bandwidth of connected devices to improve overall throughput and efficiency.

Broad Wi-Fi Range

- **Ultimate Range Wi-Fi** – Proprietary Wi-Fi optimization, 8 x high-performance antennas with optimized layout, and Beamforming deliver more capacity, stronger and more reliable connections, and less interference.
- **Beamforming Technology** – Concentrates Wi-Fi signals towards individual devices to ensure stronger connections.
- **Seamless EasyMesh network** – Transfer between seamless whole-home Wi-Fi without any drops or lag and manage your whole network using a centralized panel.

TP-Link BE19000 Tri-Band Wi-Fi 7 Router

Archer BE800

Features



Ease of Use

- **Hassle-free Management with Tether App** – Network management is made easy with the TP-Link Tether app, available on any Android and iOS device.
- **Intuitive Web UI** – Ensures quick and simple installation without hassle.
- **WPS (Wi-Fi Protected Setup)** – Help you to quickly and securely connect your devices to the router's network with a tap.
- **Backwards Compatible** – Take your Wi-Fi to the next level while being backwards compatible with existing 802.11a/b/g/n/ac/ax Wi-Fi standards.
- **LED Screen** – Easily check network status and explore more fun.
- **Works with Amazon Alexa and Google Assistant** – Utilize Amazon Alexa and Google Assistant to control everything via voice commands to enjoy truly intelligent life.

Robust Security

- **HomeShield** – TP-Link's premium security services keep your home network safe with cutting-edge features for network and IoT protection.*
- **Parental Controls** – Manage online time and block inappropriate content to control your family's digital habits.
- **Guest Network** – Provides separate access for guests to secure the home network.
- **Advanced WPA3 Encryption** – The latest WiFi security protocol, WPA3, brings new capabilities to improve cybersecurity in personal networks.**
- **Access Control** – Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet.

Value-Added Features

- **VPN Clients and Server Supported** – With VPN client support, BE800 allows specified devices in your home network to access remote VPN servers without needing to install VPN software on every device.
- **USB Port** – Connects external storage devices to rapidly share files, photos, and videos.
- **Built-in Media Server** – Allows you to play music, watch videos and view photos from any device on your network.
- **More Values** – Advanced functions like IPTV, IPv6 compatibility, and Access Point mode bring more values.

TP-Link BE19000 Tri-Band Wi-Fi 7 Router

Archer BE800

Specifications

Wireless

- **Standards:** IEEE 802.11be/ax 6 GHz, IEEE 802.11be/ax/ac/n/a 5 GHz, IEEE 802.11be/ax/n/b/g 2.4 GHz
- **WiFi Speeds:** 11520 Mbps (6 GHz) + 5760 Mbps (5 GHz) + 1376 Mbps (2.4 GHz)*
- **WiFi Range:** 8× High-Performance Antennas with Optimized Layout
- **WiFi 7 Functions:** Tri-Band, Multi-Link Operation (MLO), 320 MHz Bandwidth, 4K-QAM, and Multi-RUs
- **Working Modes:** Router Mode, Access Point Mode

Hardware

- **Ethernet Ports:** 1× 10 Gbps WAN/LAN Port + 1× 10 Gbps SFP+/RJ45 Combo WAN/LAN Port + 4× 2.5 Gbps LAN Ports⁸
- **USB Support:** 1× USB 3.0 Port¹
- **Buttons:** Power On/Off Button, Reset Button, WPS Button, Wi-Fi Button, LED Button

Security

- **WiFi Encryption:** WPA, WPA2, WPA3, WPA/WPA2-Enterprise (802.1x)
- **Network Security:** SPI Firewall, Access Control, IP & MAC Binding, Application Layer Gateway, HomeShield Security
- **Guest Network:** 6 GHz Guest Network, 5GHz Guest Network, 2.4 GHz Guest Network
- **VPN Server:** OpenVPN, PPTP, L2TP VPN Server, Wireguard VPN
- **VPN Client:** OpenVPN, PPTP, L2TP VPN Client, Wireguard VPN

Software

- **Protocols:** IPv4, IPv6
- **Service Kits:** HomeShield
- **EasyMesh:** Supported
- **Parental Controls:** HomeShield Parental Controls
- **WAN Types:** Dynamic IP, Static IP, PPPoE, PPTP, L2TP
- **Quality of Service:** QoS by Device
- **Cloud Service:** Auto Firmware Upgrade, TP-Link ID, DDNS
- **NAT Forwarding:** Port Forwarding, Port Triggering, DMZ, UPnP
- **DDNS:** TP-Link, NO-IP, DynDNS

Specifications

Physical

- Dimensions (W×D×H): 11.9 ×10.3 × 3.8 in (302× 262.5 × 96 mm)
- Package Contents:
Wi-Fi Router Archer BE800
Power Adapter
RJ45 Ethernet Cable
Quick Installation Guide
- Other
- System Requirements:
Internet Explorer 11+, Firefox 12.0+, Chrome 20.0+, Safari 4.0+, or other JavaScript-enabled browser
Cable or DSL Modem (if needed)
Subscription with an Internet service provider (for Internet access)
- Certifications: FCC, RoHS
- Environment:
Operating Temperature: 0°C ~40°C (32°F ~104°F)
Operating Humidity: 10%~90% non-condensing



For more information, please visit
<http://www.tp-link.com/products/details/Archer-BE800.html>
or scan the QR code left

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Device connections is based on laboratory test data, which analyzed the connections of different devices on the 5 GHz, 5 GHz, and 2.4 GHz bands simultaneously. These devices simulated a typical home scenario by running simultaneous applications in the same room that included 4K video, 1080p video, file downloading, web browsing, IP camera, and other IoT devices. Actual wireless data throughput, wireless coverage, and connected devices are not guaranteed and delivery as a result of internet service provider factors, network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

†Size of Wi-Fi 7 (802.11be), Wi-Fi 6E (802.11ax) and features including Multi-Link Operation (MLO), 320 MHz Bandwidth, 4K-QAM, Multi-RU, OFDMA, and MU-MIMO requires clients to also support the corresponding features.

‡The 320MHz bandwidth is only available on the 6 GHz band. Simultaneously, the 320 MHz bandwidth on the 6 GHz band and 160 MHz bandwidth on the 5 GHz band may be unavailable in some regions/countries due to regulatory restrictions. Double channel width and speed refer to 320 MHz compared to 160 MHz for Wi-Fi 6 routers.

§Wi-Fi 6E internet speeds require compatible service plans and equipment. The two 10 Gbps ports cannot be concurrently configured as Wi-Fi ports.

|| 4x faster Wi-Fi speed refers to the theoretical speeds of Wi-Fi 7 clients when connected to Archer BE800 compared with a Wi-Fi 6 or Wi-Fi 6E router. Wi-Fi 7 clients need to support Multi-Link Operation (MLO) and the 6 GHz band to reach up to 17.3 Gbps when connected to the 5 GHz and 6 GHz bands of Archer BE800 simultaneously. Wi-Fi 6 and Wi-Fi 6E routers may only provide 4804 Mbps on the 5 GHz or 6 GHz bands respectively.

¶4x Lower Latency refers to the latency improvement of Wi-Fi 7 routers compared to Wi-Fi 6E routers, based on laboratory test data. This test conditions had the same 5 GHz or 6 GHz single frequency wireless interference and based the maximum latencies of Wi-Fi 7 clients (with MLO turned on) connecting to the 5 GHz and 6 GHz bands of Archer BE800 (with MLO turned on) simultaneously and to the 5 GHz or 6 GHz bands of a Wi-Fi 6E router (without the MLO function).

**TP-Link EasyMesh-compatible products can network with other devices that use EasyMesh. Failed connections may be due to firmware conflicts of different vendors. The EasyMesh-compatible function is still being developed on some models and will be supported in subsequent software updates.

††Compressed includes the Free Basic Plan. Fees apply for the Pro Plan. Visit tp-link.com for details or for more information.

‡‡Size of WPA3 requires clients to also support the corresponding features.

§§Wi-Fi generations represent the wireless standard (IEEE 802.11 a/b/g/n/ac/ax/be). All devices need to support 802.11 Wi-Fi protocols.

||||A separate modem or gateway may be required. PPOE, Static IP and Dynamic IP are supported. VoIP and L2TP may also be supported under certain configurations.

Actual network speeds may be limited by the rate of the products Ethernet WAN or LAN port, the data supported by the network cable, internet service provider factors, and other environmental conditions.

This router may not support all the mandatory features as listed in the IEEE 802.11be specification.

Further software upgrades for feature availability may be required.

©2023 TP-Link

Test Data

- WiFi Transmission Power:
FCC: ≤ 30 dBm (2.4 GHz), ≤ 30 dBm (5 GHz), ≤ 25 dBm (6 GHz)
CE: ≤ 23 dBm EIRP (5.17 GHz-5.35 GHz), ≤ 30 dBm EIRP (5.47 GHz-5.725 GHz); ≤ 20 dBm EIRP (2.4 GHz); ≤ 23 dBm EIRP (6 GHz)
- WiFi Reception Sensitivity:
2.4 GHz:
11ax HE20 MCS0~-96dBm, 11ax HE20 MCS11~-66dBm
11ax HE40 MCS0~-93dBm, 11ax HE40 MCS11~-65dBm
11be EHT20 MCS13~-62dBm, 11be EHT40 MCS13~-58dBm
5 GHz:
11ax HE20 MCS0~-95dBm, 11ax HE20 MCS11~-64dBm
11ax HE40 MCS0~-93dBm, 11ax HE40 MCS11~-62dBm
11ax HE80 MCS0~-89dBm, 11ax HE80 MCS11~-59dBm
11ax HE160 MCS0~-85dBm, 11ax HE160 MCS11~-56dBm
11be EHT20 MCS13~-58dBm, 11be EHT40 MCS13~-56dBm
11be EHT80 MCS13~-53dBm, 11be EHT160 MCS13~-51dBm
6 GHz:
11ax HE20 MCS0~-95dBm, 11ax HE20 MCS11~-65dBm
11ax HE40 MCS0~-93dBm, 11ax HE40 MCS11~-63dBm
11ax HE80 MCS0~-90dBm, 11ax HE80 MCS11~-60dBm
11ax HE160 MCS0~-87dBm, 11ax HE160 MCS11~-58dBm
11be EHT20 MCS13~-60dBm, 11be EHT40 MCS13~-58dBm
11be EHT80 MCS13~-54dBm, 11be EHT160 MCS13~-52dBm
11be EHT320 MCS0~-84dBm, 11be EHT320 MCS13~-48dBm